



## Energy Conservation - TIER 1 ADVANCED POWER STRIP – 5 OUTLETS



Save energy and protect your devices with this smart power strip. Automatically powers off unused devices and provides surge protection.



### PRODUCT SPECIFICATIONS

<b>Voltage</b>	125 VAC
<b>VPR Rating</b>	700V L-N,L-G, N-G TYPE 3 SPD
<b>Power Rating</b>	15A 125VAC 60Hz
<b>Maximum Continuous Operating Voltage</b>	127 VAC
<b>Surge Protection</b>	1225 Joules, 1875W
<b>On/off Resettable Circuit Break</b>	Rated 15A
<b>Max Total Spike Voltage</b>	6000V
<b>Max Total Spike Current</b>	3000A
<b>Clamping Response Time</b>	< 1ns
<b>Standby Power</b>	< 1W
<b>Minimum Control Outlet Switched On Power</b>	10W±2W
<b>Plug Type</b>	Wall mounted
<b>Certifications</b>	cETLus, RoHS
<b>Warranty</b>	2 years

### DETAILED DIMENSIONS

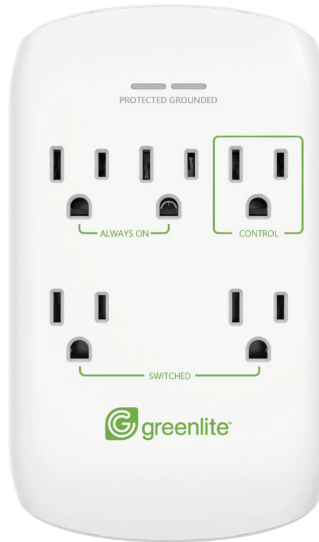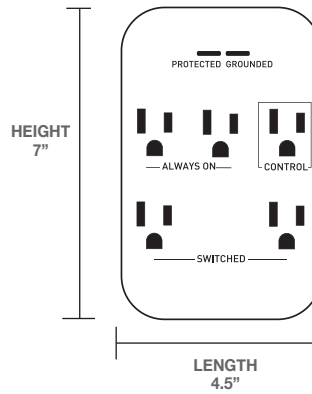


### FEATURES


- 1225 Joules
- Reduces standby power
- Compatible with >99% TVs
- Prolongs life of electronics
- Compact wall-mount design

#### 5 OUTLETS

##### 2 X ALWAYS-ON OUTLETS



##### 2 X SWITCHED OUTLETS



##### 1X CONTROL OUTLET



**WARNING:** For indoor use in dry locations only. Not intended for use with aquarium equipment, microwaves, electric kettles, refrigerators, freezers, air conditioners, electric heaters, or other high-power appliances. Do not use with power drills, bench saws, or other power tools. The combined load used on all outlets at the same time must not exceed 1800 watts. In case of overloading, the circuit breaker will safely shut off all power. Eliminate the overload, then reset by pressing the circuit breaker switch. **CAUTION: RISK OF ELECTRIC SHOCK. DO NOT PLUG INTO ANOTHER RELOCATABLE POWER STRIP OR AN EXTENSION CORD.**

### MODEL INFORMATION

MODEL	CASE QTY
APS/T105M1S2TT/A01	36

1-877-255-0004 | info@greenliteusa.com  
[www.greenliteusa.com](http://www.greenliteusa.com)

V1-121224

