



LED Lighting - 13W T8 LED TUBE


Greenlite's 13-watt Type B linear T8 LED tubes replace T8 fluorescent tubes. They require direct wiring by bypassing the existing ballast. They are a bright and reliable for many residential or commercial lighting including living rooms, garages, warehouses, offices, etc.



PRODUCT SPECIFICATIONS

| | |
|--------------------|------------------------------------|
| Wattage | 13W |
| Equivalent | 32W |
| Voltage | 120-277V |
| Lumens | 1800 |
| Lifetime | 50,000 hours |
| Color Temperature | 3500K Bright White |
| Driver | Type B Ballast Bypass Double Ended |
| Bulb Shape | T8 |
| Bulb Base | G13 |
| Material | Glass cover |
| Certifications | UL, DLC |
| UL Location Rating | Damp |
| UL Fixture Rating | Enclosed |
| Warranty | 5 years |

DETAILED DIMENSIONS

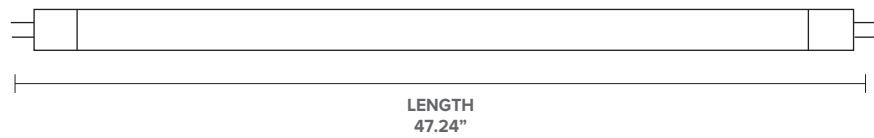

FEATURES

- Replaces fluorescent tubes
- Easy to use
- Long-lasting performance
- Maintenance-free

MODEL INFORMATION

| MODEL NUMBER | PACK SIZE | CASE QTY |
|------------------|-----------|----------|
| 13W/T8/4B/35K/DE | 1 | 25 |

1-877-255-0004 | info@greenliteusa.com

www.greenliteusa.com

V1-012825

